




## CenterScanner Compact

Professional drill guide for safely determining the entry and exit points when drilling walls and ceilings

This highly accurate drill guide consists of a transmitter and a receiver and provides safe alignment of the drill channel when drilling through walls and ceilings up to a depth of 120 cm. Easily visible LED indicators and acoustic signals that can be switched off provide the location. Highly accessible marking aids in the sender and receiver provide the centring. The required drilling depth can be determined up to 150 cm using the integral LCD display. A visual and acoustic warning is sent when foreign objects are detected. The sender and receiver fit comfortably in the hand thanks to their ergonomic design.

- Easy and safe alignment of the drill channel when drilling through walls and ceilings up to a depth of 120 cm
- Precise location of the entry and exit points using LED indicators
- Highly accessible marking aids in the sender and receiver provide the centring
- Determination of the required drilling depth up to 150 cm
- Optical and acoustic warning when foreign objects detected
- The sender and receiver fit comfortably in the hand thanks to their ergonomic design

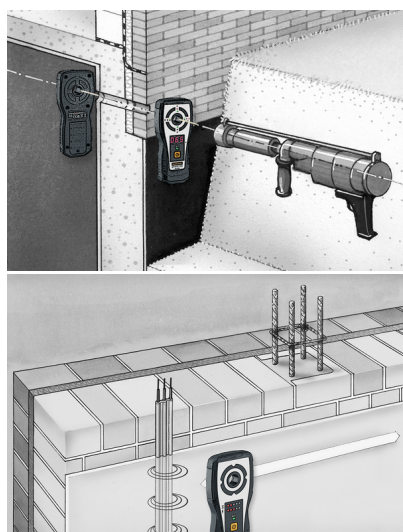

### TECHNICAL DATA

<b>Measuring Depth</b>	Positioning RECV: 2 - 120 cm wall thickness Depth display RECV: 2 - 150 cm drilling depth
<b>Accuracy</b>	typically 3% of measured depth
<b>Detection Range AC</b>	2 cm
<b>Power Supply</b>	RECV: 3 x 1.5V LR03 (AAA) / TX: 3 x 1.5V LR03 (AAA)
<b>Operating Time</b>	RECV: approx. 20 hours / TX: approx. 12 hours
<b>Operating Conditions</b>	RECV: -30°C ... 40°C / TX: -20°C ... 40°C, max. humidity 80% rH, no condensation, max. working altitude 2000 m above sea level
<b>Storage Conditions</b>	-20°C ... 60°C, max. humidity 85% rH, no condensation
<b>Dimensions (W x H x D)</b>	77 mm x 179 mm x 31 mm
<b>Weight</b>	507 g (RECV and TX incl. batteries)



6x AAA



### SCOPE OF DELIVERY



Item No. 075.400A

GTIN (EAN) 4021563730346

SU 2