


## InspectorCamera 3DM (6 mm, 1 m)

Controllable camera unit for the VideoInspector with compact, individually flexible camera head – great flexibility for tricky jobs and ideal for small openings


The controllable camera Unit has an individually flexible camera head which can be quickly adjusted to the optimum view using the joystick on the VideoInspector base unit. This allows hard-to-reach places to be investigated which cannot be viewed with fixed camera systems. The small diameter of the camera head enables even very small openings to be inspected. However, it provides very reliable, 360° inspection of, for example, pipe seals and the damage can be precisely located. The camera head and probe are waterproof and resistant to diesel, petrol, motor oil, AdBlue®, ethanol and sea water, making the device extremely versatile. The 8 high-performance LEDs ensure excellent object lighting.

### TECHNICAL DATA

<b>Diameter Camera Head</b>	6 mm
<b>Camera Resolution</b>	1280 x 720 pixels
<b>Field of View (FOV)</b>	78°
<b>Depth of Focus (DOF)</b>	3 ... 8 cm
<b>Length of Probe</b>	1 m
<b>Dimensions (W x H x D)</b>	1050 mm x 42 mm x 42 mm
<b>Weight</b>	135 g #

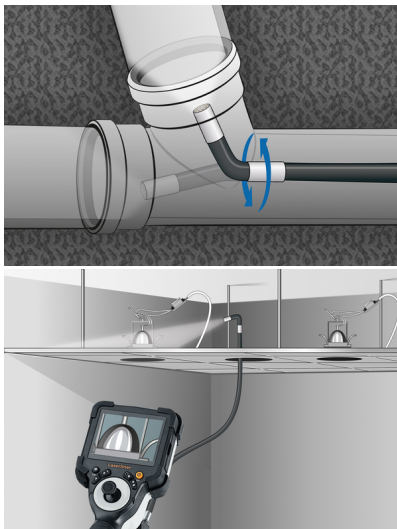

- Steerable camera unit for VideoInspector 3D
- Effective problem localisation behind or in objects, walls, pipes, cavities
- Joystick control of the camera head provides maximum flexibility and optimum viewing
- Compact camera head ideal for inspecting small openings
- Save time setting up on site with rapid adjustment of the required viewing angle

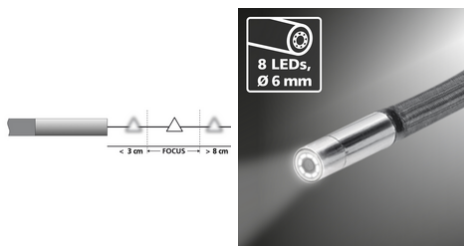

### SCOPE OF DELIVERY



Item No. 082.230A

GTIN (EAN) 4021563704705

SU 2