Laserliner

VIDEO INSPECTION FOR INDUSTRY, AUTOMOTIVE, INSTALLATION AND MANUFACTURING

Product overview
2025 / 2026



4 YEARS WARRANTY
4 JAHRE GARANTIE
CERTIFIED DESIGN AND QUALITY

SUSTAINABILITY IN FOCUS.

INVESTMENT IN THE FUTURE.

We rely on a resource-conserving production and packaging concept. We develop products that not only help you to work more precisely and efficiently, but also in a more responsible and environmentally conscious way.

LEADING BY EXAMPLE:
Protecting the climate and providing energy for the future sustainability of our business location in the Sauerland.

CORPORATE SOCIAL RESPONSIBILITY
In the future it will become more and more important to be able to prove efficiency and quality. It encourages sustainability and creates economical solutions. We stand for transparency and ethical standards in supply chains. For this reason, we are continuously reviewed and evaluated by independent platforms – such as

Sedex | Member ecovadis

Yours, Martin Wonisch
Laserliner
Executive Partner





TOTAL QUALITY MANAGEMENT DIN ISO 9001

4 YEARS WARRANTY
4 JAHRE GARANTIE
CERTIFIED DESIGN AND QUALITY

ACCURATE AND SAFE MEASURING TOOLS.
The Laserliner brand stands for modern measurement technology, which is characterised by high quality in daily use. Our products brings more safety and reliability to building sites, the trade and the industry.

CONVINCING PERFORMANCE DEMANDS THE HIGHEST STANDARDS.
Our TQM (Total Quality Management), in accordance with DIN EN ISO standards, guarantees the highest standard for our products. All products undergo statistical checks during production. Continuous audits monitor conformity to standards and ensure quality standards.

HIGH QUALITY & RELIABILITY.
We stand behind the quality of our products. That's why every purchase is backed by our comprehensive 4-year warranty, ensuring peace of mind and reliable performance year after year.


INTELLIGENT MEASURING TECHNOLOGY MANAGEMENT

DIGITAL CONNECTION

Data management made simple. Digital Connection – connection between Laserliner measuring devices and ...

App Wifi USB



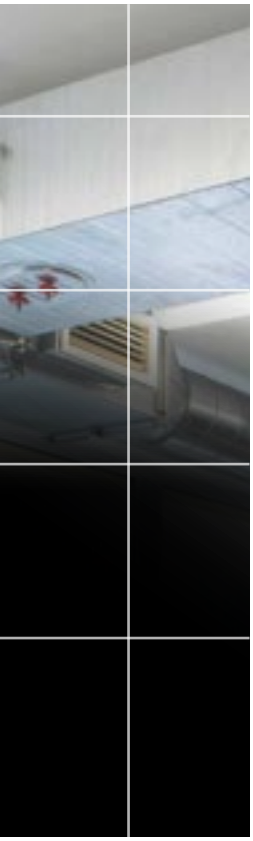

INNOVATIVE INSPECTION

Special applications and places difficult to access require innovative solutions to ensure optimum use. The smaller and more stable the camera unit the more varied the applications – whether used at home, in industry or by tradesman.

Video inspection systems for every requirement

Fixed camera unit

Interchangeable camera unit



FIXED CAMERA UNIT

VideoPocket HD



Resolution camera	1280 x 720 pixels
Resolution display	480 x 272 pixels
Image rotation	180°
Zoom function	2x in 25% increments
Data storage	●
Image recording	●
Video recording	●
Front and side camera	
LED lighting	6 LED
Length of flex cable	1 m
Camera head ø	5,2 mm
Camera head / IP class	IP67

VideoPocket HDM Duo



Resolution camera	1280 x 720 pixels
Resolution display	480 x 272 pixels
Image rotation	180°
Zoom function	2x in 25% increments
Data storage	●
Image recording	●
Video recording	●
Front and side camera	●
LED lighting	6 + 1 LED
Length of flex cable	1 m
Camera head ø	5,5 mm
Camera head / IP class	IP67

● = available



Video endoscopes



VideoPocket HD



High-resolution compact video inspection system with large display for hard-to-reach places
- 2x digital zoom in 25% increments
- Screen size: 4.3"
- REC-Function: still picture and video
- Evaluation and documentation using internal photo memory, micro SD card and USB interface
- 6 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Various views available through rotation and mirroring
- Small camera unit ideal for hard-to-reach places
- Identify specific differences with the compare image function
- Camera head: ø 5.2 mm
- DOF: Focal depth 3…8 cm
- TopClips: Hook, magnet and mirror attachment for fixing on the camera head




Camera:	Resolution: 1280 x 720 pixels
Display:	4.3" TFT-colour display Resolution: 480 x 272 pixels
Memory (external):	Supports up to max. 32 GB micro SD-card

Inclusive: VideoPocket HD, TopClips, micro-SD-card, batteries, carrying case



ORDER NO.	EAN-CODE	PU
082.262A	4 021563 721917	2

Info



CAMERA 1280 x 720 pixel · LED LIGHT · IP 67 — DISPLAY 480 x 272 pixel · 4,3" TFT · 180° · ZOOM 2x — REC · micro SD · DCS · MICRO USB · 4x AA · HARD

ACCESSORIES

Hook, magnet and mirror attachment for fixing on the camera head



Hook / magnet attachment
Pull / lift difficult to reach objects



Mirror attachment
Mirror allows objects to be viewed at 90° angle



VideoPocket HDM Duo

NEW!



High-resolution, compact video inspection system with large display, compare image function, multi-functional holder and waterproof camera unit, including front and side view
- Effective problem localisation behind or in objects, walls, pipes, cavities
- High-resolution camera for detailed image and video capture
- Multifunctional holder combines stand, magnet and hook for versatile mounting options and variable positioning for every inspection
- Flexible display: The display shows perspectives of front and side cameras individually or simultaneously in a split screen view
- Identify specific differences with the compare image function
- Small camera unit ideal for hard-to-reach places
- 6+1 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Large, exceptionally easy-to-read display
- Waterproof and dustproof camera unit
- TopClips: Magnet and hook attachment for fixing on the camera head





TOPCLIPS
Magnet and hook attachment




Camera:	Resolution: 1280 x 720 pixels
Display:	4.3" TFT-colour display Resolution: 480 x 272 pixels
Memory (external):	Supports up to max. 32 GB micro SD-card

Inclusive: VideoPocket HDM Duo, TopClips, micro-SD-card, batteries, carrying case



ORDER NO.	EAN-CODE	PU
082.264A	4 021563 735051	2

Info




CAMERA 1280 x 720 pixel · LED LIGHT · IP 67 — DISPLAY 480 x 272 pixel · 4,3" TFT · 180° · ZOOM 2x — REC · micro SD · DCS · MICRO USB · magnetic · 4x AA · HARD



INTERCHANGEABLE CAMERA UNIT

A high degree of flexibility is required to ensure optimum inspection for a wide range of requirements.
The basic units of the VideoFlex G4, VideoInspector, VideoFlex HD and VideoInspector 3D fulfil this requirement.
They are designed so that the various camera units can be exchanged in no time at all.

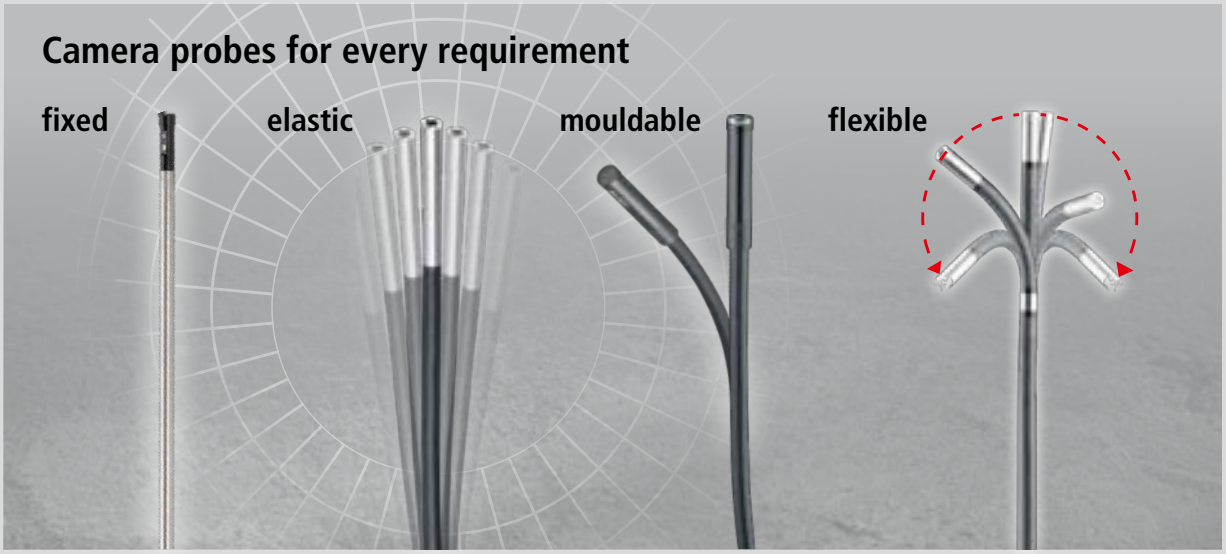

Basic units	VideoFlex G4	VideoInspector	VideoFlex HD	VideoInspector 3D
Resolution camera	max. 640 x 480 pixels	1280 x 720 pixels	1280 x 720 pixels	960 x 720 pixels
Resolution display	320 x 240 pixels	640 x 480 pixels	1280 x 720 pixels	640 x 480 pixels
Image rotation	180°	180°	180°	90°
Zoom function	2x in 20% increments	2x in 10% increments	2x in 10% increments	4x in 10% increments
Data storage	●	●	●	●
Image recording	●	●	●	●
Video recording	●	●	●	●
External image output	Video out		USB-C	HDMI
Li-ion battery	●	●	●	●

● = available





DIGITAL CONNECTION

Simple data management via USB



Camera units

Basic unit
VideoFlex G4





	Micro Camera	XXL Camera	Ultra Camera	VarioView Camera	MaxView Camera	DuoView Camera	FixView Camera	ArcView Camera
Resolution camera	640 x 480 pixels	640 x 480 pixels	640 x 480 pixels	640 x 480 pixels	640 x 480 pixels	640 x 480 pixels	320 x 240 pixels	640 x 480 pixels
Front and side camera						●		
LED lighting	4 LED	4 LED	4 LED	1 LED	4 LED	4 + 2 LED	4 LED	4 LED
Length of flex cable	1,5 m	5 m	10 m	1,5 m	1,5 m	1 m	40 cm	1 m
Camera head ø	6 mm	9 mm	9 mm	17 mm	17 mm	10 mm	4 mm	9 mm
Camera head / IP class	IP 68	IP 68	IP 68	IP 67	IP 67	IP 67	IP 67	IP 67
Order no. display + camera	082.241A	082.243A	082.240A	082.247A	082.246A	082.244A	082.248A	082.245A
Order no. camera	082.221A	082.219A	082.220A	082.218A	082.217A	082.215A	082.209A	082.214A

Basic unit
VideoInspector





	Inspector Camera	Inspector Camera XXL	Inspector Camera Mini	Inspector Camera 3DX	Inspector Camera 3DM	Inspector Camera 3DL
Resolution camera	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels
LED lighting	8 LED	8 LED	8 LED	8 LED	8 LED	8 LED
3D function				●	●	●
Length of flex cable	1,5 m	5 m	1,5 m	1 m	1 m	2 m
Camera head ø	7,9 mm	7,9 mm	6 mm	9 mm	6 mm	6 mm
Camera head / IP class	IP 68	IP 68	IP 68	IP 68	IP 68	IP 68
Order no. display + camera	082.233A	082.238A	082.237A	082.235A	082.234A	082.236A
Order no. camera	082.233.1	082.238.1	082.237.1	082.231A	082.230A	082.232A

Basic unit
VideoFlex HD






	HD FlexCamera	HD MicroCamera	Set 1: HD DuoCamera	Set 2: HD DuoCamera	HD BoreScope-DuoCamera	HD 3DM-Controller Camera
Resolution camera	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels	1280 x 720 pixels
Front and side camera			●	●	●	
LED lighting	8 LED	6 LED	6 + 1 LED	6 + 1 LED	6 + 1 LED	8 LED
3D function						●
Length of flex cable	1,5 m	2 m	2 m	3 m	30 cm	1 m
Camera head ø	7,9 mm	3,9 mm	5 mm	7,9 mm	5 mm	6 mm
Camera head / IP class	IP 68	IP 68	IP 68	IP 68	IP 67	IP 68
Order no. display + camera	082.282A	082.281A	082.283A	082.280A	–	–
Order no. camera	082.282.55	082.281.55	082.283.55	082.280.55	082.284A	082.286A

Basic unit
VideoInspector 3D






	Inspector Camera 3D Micro	Set 1: Inspector Camera 3D	Set 2: Inspector Camera 3D
Resolution camera	960 x 720 pixels	960 x 720 pixels	960 x 720 pixels
LED lighting	6 LED	6 LED	6 LED
3D function	●	●	●
Length of flex cable	1 m	1 m	2 m
Camera head ø	3,9 mm	6 mm	6 mm
Camera head / IP class	IP 67	IP 68	IP 68
Order no. display + camera	082.277A	082.270A	082.275A
Order no. camera	082.278A	082.271A	082.276A

● = available

Manual 3D control of the small camera head

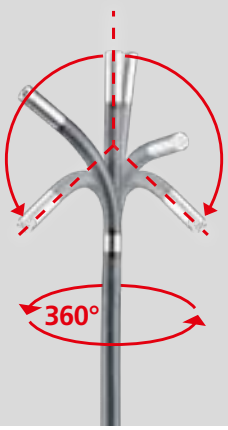




Video endoscopes



SMARTVIEW

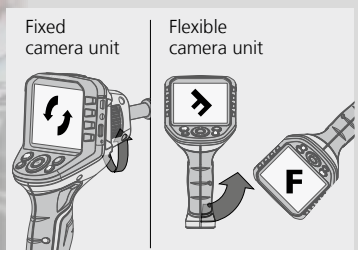

SMARTVIEW

Intuitive rotation of the base unit for easy orientation



VideoFlex G4 Micro

Professional video inspection system for visually inspecting areas that are difficult to access



VideoFlex G4
– 2x digital zoom in 20% increments
– SmartView: optimal image alignment
– Connection of external monitors via TV Out
– REC-Function: picture and video
– Evaluation and documentation using micro SD card and USB-C interface
– Screen size: 3.5"
– Image rotation in 180° increments
– Mirror function for correcting mirror-inverted images.
– Quick replacement of camera unit

MicroCamera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 6 mm
– DOF: Focal depth 1…6 cm







Camera:	Resolution: 640 x 480 pixels
Display:	3.5" TFT-colour display Resolution: 320 x 240 pixels
Memory (external):	Supports up to max. 16 GB micro SD-card

Inclusive: VideoFlex G4, MicroCamera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.241A	4 021563 715732	2

ø 6 mm

Info

CAMERA 640 x 480 pixel | LED LIGHT | IP 68
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x
REC | micro SD | DCI | USB-C | Li-Ion Accu | HARD

VideoFlex G4 XXL

Product description same as VideoFlex G4 with XXLCamera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 9 mm
– DOF: Focal depth 1…6 cm





Inclusive: VideoFlex G4, XXLCamera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.243A	4 021563 715756	2

ø 9 mm

Info

CAMERA 640 x 480 pixel | LED LIGHT | IP 68
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x
REC | micro SD | DCI | USB-C | Li-Ion Accu | HARD

VideoFlex G4 Ultra

Product description same as VideoFlex G4 with UltraCamera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 9 mm
– DOF: Focal depth 1…6 cm
– TopClips: Mirror, magnet and hook attachment for fixing on the camera head
– TopGuide: Guide sleeve – for smooth movement on uneven surfaces









Inclusive: VideoFlex G4, UltraCamera, TopClips, TopGuide, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.240A	4 021563 715725	2

ø 9 mm

Info

CAMERA 640 x 480 pixel | LED LIGHT | IP 68
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x
REC | micro SD | DCI | USB-C | Li-Ion Accu | HARD

Special models

VideoFlex G4 Vario


SPECIAL!



ø 17 mm

Info

Product description same as VideoFlex G4 with VarioView Camera
– 1 high-performance LED on the camera for powerful object lighting
– Camera head: ø 17 mm
– DOF: Focal depth 3…7 cm





Inclusive: VideoFlex G4, VarioView Camera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.247A	4 021563 716012	2

CAMERA 640 x 480 pixel | LED LIGHT | IP 67
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | Li-Ion Accu | HARD

VideoFlex G4 Max

SPECIAL!



ø 17 mm

Info

Product description same as VideoFlex G4 with MaxView Camera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head: ø 17 mm
– DOF: Focal depth 2…30 cm





Inclusive: VideoFlex G4, MaxView Camera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.246A	4 021563 716005	2

CAMERA 640 x 480 pixel | LED LIGHT | IP 67
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | Li-Ion Accu | HARD

VideoFlex G4 Duo


SPECIAL!



ø 10 mm

Info

Product description same as VideoFlex G4 with DuoView Camera
– 4 high-performance LEDs on the camera and 2 LEDs on the side for powerful object lighting
– Camera head: ø 10 mm
– DOF: Focal depth 3…50 cm





Inclusive: VideoFlex G4, DuoView Camera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.244A	4 021563 715985	2

CAMERA 640 x 480 pixel | LED LIGHT | IP 67
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | Li-Ion Accu | HARD

VideoFlex G4 Fix

SPECIAL!



ø 4 mm

Info

Product description same as VideoFlex G4 with FixView Camera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head: ø 4 mm
– DOF: Focal depth 3…7 cm





Inclusive: VideoFlex G4, FixView Camera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.248A	4 021563 716029	2

CAMERA 320 x 240 pixel | LED LIGHT | IP 67
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | Li-Ion Accu | HARD

VideoFlex G4 ArcView


SPECIAL!



ø 9 mm

Info

Product description same as VideoFlex G4 with ArcView Camera
– 4 high-performance LEDs on the camera for powerful object lighting
– Camera head: ø 9 mm
– DOF: Focal depth 3…5 cm





Inclusive: VideoFlex G4, ArcView Camera, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, video cable, carrying case



ORDER NO.	EAN-CODE	PU
082.245A	4 021563 715992	2

CAMERA 640 x 480 pixel | LED LIGHT | IP 67
DISPLAY 320 x 240 pixel | 3,5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | Li-Ion Accu | HARD

Video endoscopes



VideoInspector



ø 7,9 mm



Info

Professional video inspection system for visually inspecting areas that are difficult to access

VideoInspector
– 2x digital zoom in 10% increments
– Media gallery with date / time information on the images
– Various views available through rotation and mirroring
– REC-Function: picture and video
– Screen size: 3.5“
– Can also run on mains power
– USB port for data transfer and charging battery
– Energy-saving, automatic switch-off after an adjustable set period of time
– Quick replacement of camera unit

InspectorCamera
– 8 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 7,9 mm
– DOF: Focal depth 3…8 cm
– TopClips: Mirror, magnet and hook attachment for fixing on the camera head





TOPCLIPS Mirror, magnet and hook attachment

LI-ION POWER USB-C

Camera:	Resolution: 1280 x 720 pixels
Display:	3.5" TFT-colour display Resolution: 640 x 480 pixels
Memory (external):	Supports up to max. 32 GB micro SD-card

Inclusive: VideoInspector, InspectorCamera, TopClips, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.233A	4 021563 732197	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 — DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x — REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

VideoInspector XXL

NEW!

ø 7,9 mm

Info



Product description same as VideoInspector with InspectorCamera XXL
– 8 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 7,9 mm
– DOF: Focal depth 3…8 cm
– TopClips: Mirror, magnet and hook attachment for fixing on the camera head

TOPCLIPS Mirror, magnet and hook attachment

LI-ION POWER USB-C

Inclusive: VideoInspector, InspectorCamera XXL, TopClips, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.238A	4 021563 737796	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 — DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x — REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

VideoInspector Mini

NEW!

ø 6 mm

Info



Product description same as VideoInspector with InspectorCamera Mini
– 8 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 6 mm
– DOF: Focal depth 3…8 cm

LI-ION POWER USB-C

Inclusive: VideoInspector, InspectorCamera Mini, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.237A	4 021563 737789	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 — DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x — REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

Video endoscopes



VideoInspector 3DX

3D



ø 9 mm

Info

Product description same as VideoInspector with InspectorCamera 3DX
- Maximum flexibility and optimum viewing with manual 3D control of the camera head
- Perfect for hard to reach locations which cannot be viewed with fixed camera
- 8 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Camera head: ø 9 mm
- DOF: Focal depth 1.5…10 cm



Inclusive: VideoInspector, InspectorCamera 3DX, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.235A	4 021563 723294	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 | DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x | 3D | REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

VideoInspector 3DM

NEW!

3D



ø 6 mm

Info

Product description same as VideoInspector with InspectorCamera 3DM
- Maximum flexibility and optimum viewing with manual 3D control of the camera head
- Perfect for hard to reach locations which cannot be viewed with fixed camera
- 8 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Camera head: ø 6 mm
- DOF: Focal depth 3…8 cm



Inclusive: VideoInspector, InspectorCamera 3DM, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.234A	4021563 736829	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 | DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x | 3D | REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

VideoInspector 3DL

NEW!

3D



ø 6 mm

Info

Product description same as VideoInspector with InspectorCamera 3DL
- Maximum flexibility and optimum viewing with manual 3D control of the camera head
- Perfect for hard to reach locations which cannot be viewed with fixed camera
- 8 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Camera head: ø 6 mm
- DOF: Focal depth 3…8 cm



Inclusive: VideoInspector, InspectorCamera 3DL, Li-ion battery, power supply/battery charger incl. international adapter, USB cable, micro-SD-card, magnetic holder, carrying case



ORDER NO.	EAN-CODE	PU
082.236A	4 021563 723300	1

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 | DISPLAY 640 x 480 pixel | 3,5" TFT | 180° | ZOOM 2x | 3D | REC | micro SD | USB-C | 1/4" | mag. | Li-Ion Accu | HARD

Industrial endoscopes



VideoFlex HD







ø 7,9 mm

Info



Professional, high-resolution video inspection system

VideoFlex HD
- Effective problem localisation behind or in objects, walls, pipes, cavities
- Very detailed image and video capture using high-resolution camera and 1:1 reproduction on the display with no loss of quality
- 2x digital zoom in 10% increments
- REC-Function: picture and video
- Evaluation and documentation using micro-SD-card and USB-C interface
- Extremely clear digital zoom due to camera's high resolution
- Screen size: 5"
- Image rotation in 180° increments
- Suitable image available on the monitor through rotation and mirroring
- Webcam function for live transmission of inspections to a PC – perfect for stationary operation in industry
- Optimum greyscale contrast reproduction
- Quick replacement of camera unit

HD FlexCamera
- 8 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Camera head: ø 7.9 mm
- DOF: Focal depth 3…8 cm
- TopClips: Mirror, magnet and hook attachment for fixing on the camera head





TOPCLIPS Mirror, magnet and hook attachment

HIGH CAPACITY PACK USB-C

Camera:	Resolution: 1280 x 720 pixels
Display:	5" TFT-colour display Resolution: 1280 x 720 pixels
Memory (external):	Supports up to max. 32 GB micro SD-card

Inclusive: VideoFlex HD, HD FlexCamera, TopClips, Li-ion battery pack, power supply/battery charger incl. international adapter, USB cable, magnetic holder, micro-SD-card, carrying case

ORDER NO.	EAN-CODE	PU
082.282A	4 021563 732210	1



CAMERA 1280 x 720 pixel | LED LIGHT | IP 68
DISPLAY 1280 x 720 pixel | 5" TFT | 180° | ZOOM 2x
REC | micro SD | DCS | USB-C | magnetic | Li-Ion Accu pack | HARD

VideoFlex HD Micro

Product description same as VideoFlex HD with HD MicroCamera
- Small camera head, ideal for places that are hard to reach
- 6 high-performance LEDs on the camera for powerful object lighting
- Camera head and probe resistant to petrol and diesel
- Camera head: ø 3,9 mm
- DOF: Focal depth 3…8 cm



ø 3,9 mm

Info

HIGH CAPACITY PACK USB-C


Inclusive: VideoFlex HD, HD MicroCamera, Li-ion battery pack, power supply/battery charger incl. international adapter, USB cable, magnetic holder, micro-SD-card, carrying case

ORDER NO.	EAN-CODE	PU
082.281A	4 021563 723324	1



CAMERA 1280 x 720 pixel | LED LIGHT | IP 68
DISPLAY 1280 x 720 pixel | 5" TFT | 180° | ZOOM 2x
REC | micro SD | DCS | USB-C | magnetic | Li-Ion Accu pack | HARD

Industrial endoscopes and accessories

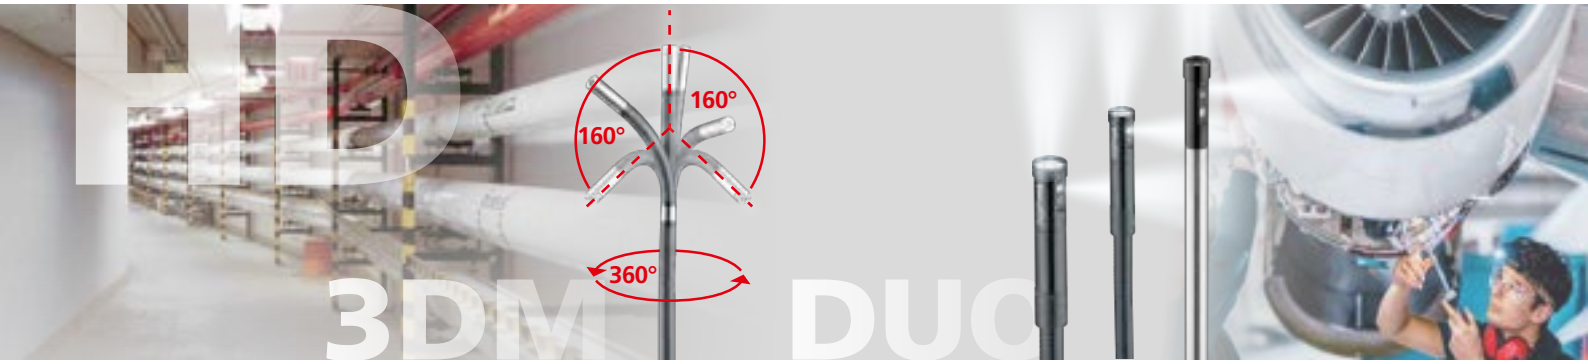

VideoFlex HD Duo



Product description same as VideoFlex HD with HD DuoCamera set 1 or set 2

Set 1: HD DuoCamera / ø 5 mm / 2 m
– Quick change of view at the touch of a button thanks to front and side cameras
– 6 high-performance LEDs on the camera and 1 LED on the side for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 5 mm
– DOF: Focal depth front: 3…8 cm / side: 2…5 cm
– TopClips: Magnet and hook attachment for fixing on the camera head

Set 2: HD DuoCamera / ø 7,9 mm / 3 m
– Product description same as HD DuoCamera, set 1
– Camera head:: ø 7.9 mm









Inclusive: VideoFlex HD, HD DuoCamera, TopClips, Li-ion battery pack, power supply/battery charger incl. international adapter, USB cable, magnetic holder, micro-SD-card, carrying case


Set 1: HD DuoCamera / ø 5 mm / 2 m

Set 2: HD DuoCamera / ø 7,9 mm / 3 m


ORDER NO.		EAN-CODE	PU
Set 1	082.283A	4 021563 732258	1
Set 2	082.280A	4 021563 713622	1



Info Set 1



Info Set 2



CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 | DISPLAY 1280 x 720 pixel | 5" TFT | 180° | ZOOM 2x | REC | micro SD | USB-C | magnetic | Li-ion Accu pack | HARD


HD BoreScope-Duo Camera



Info

Digital endoscope for VideoFlex HD with small diameter and front and side cameras
– 6 high-performance LEDs on the camera and 1 LED on the side for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 5 mm
– DOF: Focal depth front: 3…8 cm / side: 2…5 cm

CAMERA 1280 x 720 pixel | LED LIGHT | IP 67 | SOFT





Inclusive: HD BoreScope-DuoCamera, softbag

ORDER NO.	EAN-CODE	PU
082.284A	4 021563 732234	1



HD 3DM-Controller Camera



Info



Controllable camera unit for VideoFlex HD
– Joystick control of the camera head provides maximum flexibility and optimum viewing
– 8 high-performance LEDs on the camera for powerful object lighting
– Camera head and probe resistant to petrol and diesel
– Camera head: ø 6 mm
– DOF: Focal depth 3…8 cm

CAMERA 1280 x 720 pixel | LED LIGHT | IP 68 | HARD



Inclusive: InspectorCamera 3DM, HD controller

ORDER NO.	EAN-CODE	PU
082.286A	4 021563 732487	1

Industrial endoscopes



VideoInspector 3D Micro

NEW!

3D



ø 3,9 mm

Info



Professional video inspection system with individually movable, extremely compact camera head for confined areas

VideoInspector 3D
– 4x digital zoom in 10% increments
– Connection of external monitors via HDMI
– REC-Function: picture and video
– Screen size: 3.5"
– Image rotation in 90° increments
– Hold function: freeze frame
– USB port for charging battery
– Quick replacement of camera unit

InspectorCamera 3D Micro
– Manual 3D control of titanium camera head which moves through max. 150°
– Small camera head, ideal for places that are hard to reach
– 6 high-performance ceramic LEDs on the camera for powerful object lighting
– Camera head and probe can be used in petrol and diesel
– Camera head: ø 3.9 mm
– DOF: Focal depth 3…10 cm
– High-grade, long-life flexible tungsten tubing







Camera:	Resolution: 960 x 720 pixels
Display:	3.5" TFT-colour display Resolution: 640 x 480 pixels
Memory (external):	Supports up to max. 8 GB micro SD-card

Inclusive: VideoInspector 3D, InspectorCamera 3D Micro, Li-ion battery, USB charge cable, magnetic holder, HDMI cable, micro-SD-card, card reader, screwdriver, carrying case



ORDER NO.	EAN-CODE	PU
082.277A	4 021563 734924	1

CAMERA 960 x 720 pixel | LED LIGHT | IP67 — DISPLAY 640 x 480 pixel | 3,5" TFT | 360° | ZOOM 4x | 3D | REC | micro SD | magnetic | Li-Ion Accu | HARD

VideoInspector 3D

3D



ø 6 mm

Info Set 1

Info Set 2



Product description same as VideoInspector 3D Micro with InspectorCamera 3D set 1 or set 2

Set 1: InspectorCamera 3D / ø 6 mm / 1 m
– Manual 3D control of titanium camera head which moves through max. 160°
– 6 high-performance ceramic LEDs on the camera for powerful object lighting
– Camera head and probe can be used in petrol and diesel
– Camera head: ø 6 mm
– DOF: Focal depth 2.5…10 cm
– High-grade, long-life flexible tungsten tubing

Set 2: InspectorCamera 3D / ø 6 mm / 2 m
– Product description same as InspectorCamera 3D, set 1
– Manual 3D control of titanium camera head which moves through max. 150°







Inclusive: VideoInspector 3D, InspectorCamera 3D, Li-ion battery, USB charge cable, magnetic holder, HDMI cable, micro-SD-card, card reader, screwdriver, carrying case

Set 1: InspectorCamera 3D / ø 6 mm / 1 m

Set 2: InspectorCamera 3D / ø 6 mm / 2 m



ORDER NO.	EAN-CODE	PU
Set 1 082.270A	4 021563 708208	1
Set 2 082.275A	4 021563 732142	1

CAMERA 960 x 720 pixel | LED LIGHT | IP68 — DISPLAY 640 x 480 pixel | 3,5" TFT | 360° | ZOOM 4x | 3D | REC | micro SD | magnetic | Li-Ion Accu | HARD

BlackLine Professional Sales Program. Leading brand name products.

> Link to the PDF catalogue

Laserliner measuring technology enhances safety and reliability across construction sites, trades, and industries. It simplifies your work and enables precise measurements, even in inaccessible locations. The Professional Sales Program BlackLine contains professional tools designed for long-term use.



Humidity and moisture measuring devices

– Surface measurement and building moisture analysis
– Push-in/depth moisture measurement
– Humidity and condensation



Electronic measuring tools

– Digital slope indicators
– Digital spirit levels
– Digital angle gauge



Temperature measuring instruments

– Contact and ambient temperature measurement
– Infrared temperature measurement



Distance meters

– Laser distance measurement
– Distance measuring wheels



Thermal imaging cameras

– Thermal visualisation
– Thermal analysis



Line and sensor lasers

– Crossline lasers
– 3D-lasers
– Pendulum and sensor lasers



Environment and special measuring devices

– Measurement of air flow, sound and paint layer thicknesses



Hybrid- and rotary lasers

– Interior finishing work, above and below ground construction
– Accessories



Video inspection

– Video endoscopes
– Industrial endoscopes



Automatic levelling instruments

– Proven and tested optical measuring instructions



Electrical meters

– Phase and voltage testers
– Multimeters
– Cable detector



Accessories for laser and levelling devices

– Tripods
– Fasteners
– Levelling staffs



Electronic scanners

– Stud, metal and power cable locating
– Drill guides



Laserliner Store

– Brand shop



Devices have a warranty of 4 years from purchase date on. Rechargeable batteries and accessories are excluded.

Further information on www.laserliner.com/garantie

YouTube

UMAREX GmbH & Co. KG
– Laserliner –

Gut Nierhof 2
59757 Arnsberg, Germany

Telefon +49 2932 9004-0
info@laserliner.com
www.laserliner.com

Valid from 01.03.2025. Subject to our General Terms and Conditions of Delivery and Payment. These offers are determined for industry, commerce, handcraft and trade.

Changes in colour and design, setting combinations and product images as well as technical enhancements reserved. All information without liability on our part.

Photo archives: UMAREX Laserliner · istockphoto · shutterstock · Adobe Stock

4 021563 743506

020.25.041EN 300 Rev25W15