

Laserliner


SensoLite 210 Set



Laser receiver for red rotary lasers

This laser receiver is suitable for red rotary lasers and provides time-saving, close and long-range alignment within a 200 metre range. The easy-to-read LC display on the front and clear acoustic signals provide the user with information on the height of the laser beam. The universal mount allows the device to be easily attached to levelling staffs. The integrated head magnet allows the device to be attached to metal surfaces.

- Laser handheld receiver for red rotary lasers
- Fast alignment work in close and long range
- Easily fixed to measuring staff with universal holder
- Switchable, extremely loud Piezo buzzer sound
- Head magnet allow quick attachment to metallic surfaces

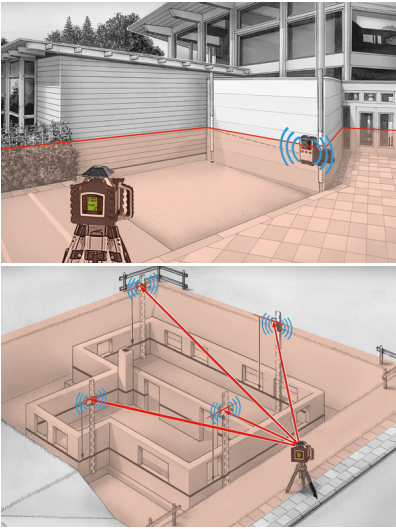

TECHNICAL SPECIFICATIONS

PROTECTION CLASS	IP 66
POWER SOURCE	4 x 1.5V LR03 (AAA)
OPERATING TIME	approx. 80 hours
OPERATING CONDITIONS	-10°C ... 40°C, max. humidity 20% ... 85% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	75 mm x 148 mm x 22 mm x (without universal mount)
WEIGHT	215 g (incl. batteries)



**LONG
OUTDOOR
RANGE**
200m



FAST



**HIGH!
SPEED!**

