




MultiClamp-Meter

Professional current and voltage clamp meter with true r.m.s. Measurement - Recycled material is used for sustainability

This professional current and voltage clamp meter is suitable for use with currents, voltages, resistances, continuity testing and diode testing. The high measurement resolution allows voltages and resistances to be precisely determined. The device determines the true RMS value for DC and AC currents regardless of the wave form. When measuring direct current, DC zeroing provides accurate results. Live components are quickly located with the integrated, non-contact voltage indicator. Variable measured values can be captured with the MIN/MAX function. Short-term inrush currents can also be determined with the additional PEAK function.

- Sustainable design: large proportion of the housing is made from recycled plastic
- Fast and accurate measurement of current, voltage and resistance.
- Suitable for all closed electrical circuits (AC/DC)
- DC zeroing for exact DC measurement results
- Diode test function for determining integrity and polarity
- Peak-HOLD function for determining short-term inrush currents
- Integrated, non-contact voltage indicator
- MIN/MAX function for determining variable measurements
- Integrated torch for illuminating the test area
- Easy-to-read display

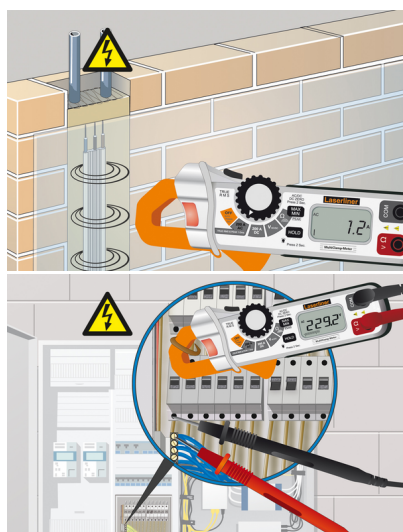

TECHNICAL DATA

Measured Variable	Direct current / alternating current Direct voltage / alternating voltage Resistance
Features	automatic measuring range MAX MIN HOLD automatic switch-off non-contact alternating voltage detection (AC warning) Maximum voltage value function (peak) True RMS single-pole phase test
AC Voltage	Range / Resolution / Accuracy*: 600.0V / 0.1V / $\pm (1.5\% + 8)$ Bandwidth: 50 ... 400 Hz True RMS
DC Voltage	Range / Resolution / Accuracy*: 600.0V / 0.1V / $\pm (1.0\% + 2)$

SCOPE OF DELIVERY



CAT III
600V

AutoSound

2x
AAA

Item No. 083.040E

GTIN (EAN) 4021563738991

SU 5